


# USB 2.0 HUB



**USB 2.0**  
Ready!

(Front)

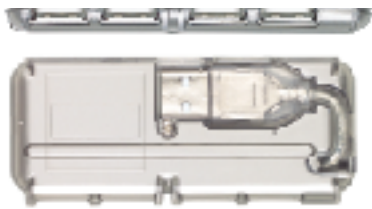


(Back)

## Installation:

1. Make sure that the device you are connecting to is powered off.
2. Pull the hub's USB cable out of its storage compartment, and plug it into your device's USB port.
3. Plug the hub's power adapter into an AC source, then plug the power adapter cable into the hub's power jack.
4. Power On your device. Under Windows, the hub will be detected automatically. If the necessary drivers haven't already been installed, Windows will install them.
5. Plug your USB peripherals into any available port.

### Diagram

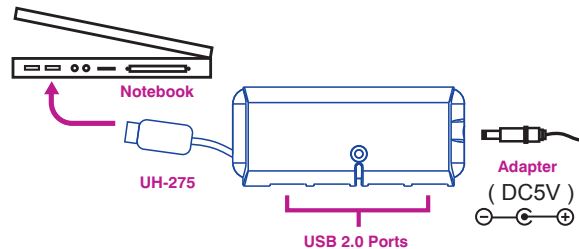

Model: **UH-275**

## Features

- Access up to 4 USB devices simultaneously
- Compliant with the USB 2.0 specification
- Fully backward compatible to USB 1.1 devices
- Super compact, lightweight design – great for mobile users ; Only 38x90x12mm (WxDxH)
- Plug -n- play and hot swappable
- Built-in cable management system
- Per Port Over current protection
- LED status indicator
- Optional Power adaptor for your high power needs

## Specifications:

Power Supply	Self / Bus	
Port	4	
USB Spec	USB 2.0	
Connectors	Downstream	4 x *USB Type-A (F)
	Upstream	1 x USB Type-A Plug (M)
	Power	1 DC Jack
Protection	1 x Polyfuse	
Driver Support	Windows 98, 98SE, 2000, Me, XP	
LED	Power	1* Green on the top
Captive Cable Length	5 m	
Power Adaptor	DC5V, 2.6A (option)	
Operating Temp.	0°C ~ 50°C	
Storage Temp.	-20°C ~ 60°C	
Humidity	0 ~ 80% RH, NC	
Enclosure	Plastic	
Dimensions (L*W*H)	90 x 38 x 12 mm	