


CL6700


DVI LCD Console

The CL6700 DVI LCD Console is a KVM control unit featuring an integrated 19" DVI LCD panel, a full keyboard, and a touch pad in a 1U rack-mountable sliding housing with audio support. The CL6700 serves as the front end sliding console for compatible DVI KVM switches. This means users who already have a compatible KVM switch can take advantage of the space saving and efficiency benefits of the sliding console module without having to purchase a KVM switch module.

For added convenience, a port for an external USB mouse is provided on the unit's front panel, while ports for an extra console (USB mouse, USB keyboard, DVI monitor and VGA monitor) for a second user are provided on the rear panel.



Setup

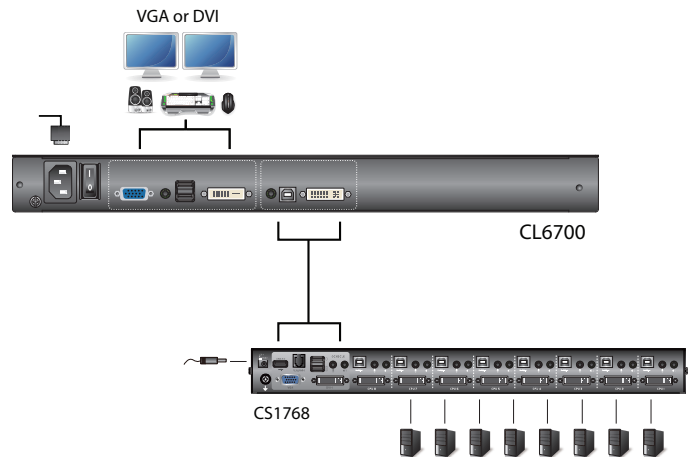

Features

- Integrated KVM console with a 19" DVI LCD monitor in a single rail housing with top and bottom clearance for smooth operation in a 1U high system rack
- Standard rack mount kit included – optional Easy Rack Mounting (single person installation) rack mount kit available (requires separate purchase)
- Supports an external console with USB / DVI / VGA connectors
- Additional hot-pluggable USB mouse port on front panel (also functions as USB peripheral port)
- Audio support (speakers)
- Superior video quality – up to 1280 x 1024 @75 Hz; DDC, DDC2, DDC2B
- Standard 105-key keyboard; Sun keyboard emulation
- Multiplatform support – Windows, Linux, Mac, and Sun
- Compatible with most ATEN DVI KVM Switches
- Adjustable depth to fit within the rack
- Firmware upgradeable
- Console lock – enables the console drawer to remain securely locked away in position when not in use
- DDC emulation – video settings of each computer are automatically adjusted for optimal output to the monitor

Specifications

| Function | | CL6700 | |
|----------------------|-----------------------------|------------------------------|-------------------------------------|
| Computer Connections | | 1 | |
| Console Selection | | Hotkey | |
| Connectors | External Console Ports | Keyboard | 1 x USB Type A Female (White) |
| | | Mouse | 1 x USB Type A Female (White) |
| | | Monitor 1 | 1 x DVI-D Female (White) |
| | | Monitor 2 | 1 x HDB-15 Female (Blue) |
| | | Speaker | 1 x Mini Stereo Jack Female (Green) |
| | KVM Ports | KB / Mouse | 1 x USB Type B Female (White) |
| | | Monitor | 1 x DVI-I Female (White) |
| | | Speaker | 1 x Mini Stereo Jack Female (Green) |
| | External Mouse / Peripheral | | 1 x USB Type A Female (Black) |
| | Power | | 1 x 3-prong AC Socket |
| Switches | Reset | 1 x Semi-recessed Pushbutton | |
| | Power | 1 x Rocker | |
| | FW Upgrade | 1 x Slide | |
| | LCD Power | 1 x Pushbutton | |
| | LCD Adjustment | 4 x Pushbutton | |
| LEDs | Power | | 1 (Green) |
| | | Num | 1 (Green) |
| | | Caps | 1 (Green) |
| | | Scroll | 1 (Green) |
| Emulation | Keyboard / Mouse | USB | |
| Video | | 1280 x 1024@75Hz, DDC2B | |
| I/P Rating | | 100–240VAC; 50–60Hz; 1A | |
| Power Consumption | | 120V, 24.6W / 230V, 25.4W | |
| Environment | Operating Temp. | 0–50°C | |
| | Storage Temp. | -20–60°C | |
| | Humidity | 0–80% RH Non-condensing | |
| Physical Properties | Housing | Metal | |
| | Weight | 13.09 kg | |
| | Dimensions (L x W x H) | 58.92 x 48.00 x 4.40 cm | |

* Product specifications and appearance are subject to change without notice.