


# KL3116


## Hideaway™ LCD KVM Switch

We understand that space in your data center is limited. That's why we've created the KL3116 Hideaway™ LCD KVM Switch, a keyboard, video, and mouse (KVM) switch that offers secure access to 16 attached computers and mounts in only 1U of rack space. It features independently retractable 17" LCD monitor and keyboard with built-in touchpad. To maximize space in your data center the keyboard "hides away" when not in use, while the thin profile LCD monitor provides continuous monitoring of computers.

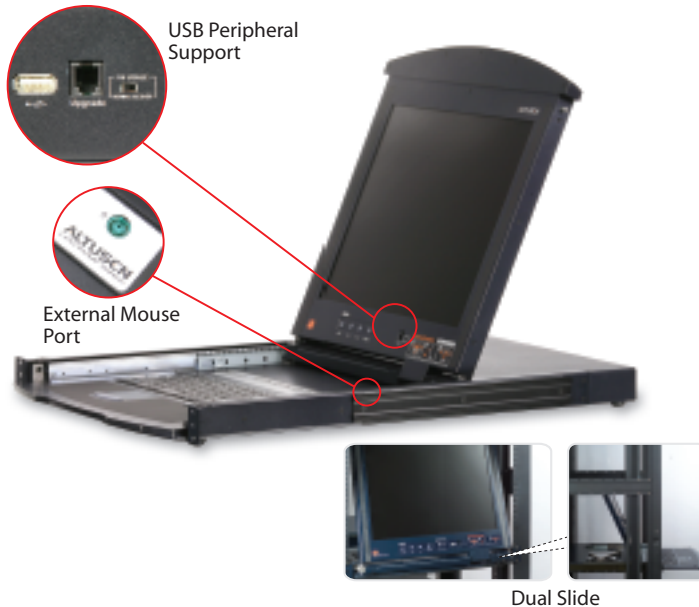

<b>Shared Access</b> 2 Local Users	<b>2nd Console</b> SPHD-15 <b>USB</b>	<b>Computers</b> SPHD-15 <b>PS/2, USB</b>	<b>OS Support</b> Win, Mac, Linux, Unix, Sun, FreeBSD
<b>Expansion</b> Daisy Chain	<b>USB Peripherals</b> <b>USB 1.1</b>	<b>External Mouse</b> <b>PS/2</b>	

### Diagram

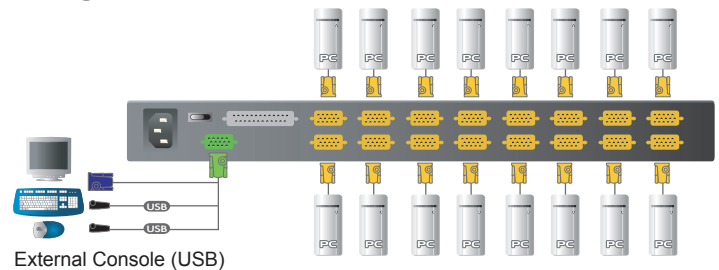

### Features

- Integrated KVM console with 17" LCD monitor in a Hideaway™ housing
- Space saving technology — up to two consoles (one bus) control up to 16 computers
- Extra console port — manage computers in the LCD KVM switch from an external console (monitor, USB keyboard, and USB mouse)
- Dual interface — supports PS/2 and USB keyboards and mice in the computer ports
- Hideaway™ housing is slightly less than 1U with top and bottom clearance for smooth operation in 1U of rack space
- Dual slide — LCD monitor slides independently of the keyboard/touchpad
- Supports external PS/2 mouse
- USB peripheral support for attached computers
- Conveniently located station and port selectors with 7-segment LED displays to quickly switch to target computers
- Dedicated Hotkey Mode and OSD Invocation Keys reduce the number of keystrokes and provide quick access to these functions
- OSD tree structure makes finding and managing computers easy
- Daisy chain up to 31 additional KVM switches to control up to 512 computers
- Auto Scan Mode enables continuous monitoring of user-selected computers
- Security — Administrator/User password authorization for enhanced security protection; Administrator access rights synchronized between master and slave stations
- Two-level password security — only authorized users can view and control computers
- Supports one Administrator and four User accounts with separate profiles
- Superior video quality — supports resolutions up to 1280 x 1024 @ 75Hz

### Specifications

Function		KL3116
Computer Connections	Direct	16
	Max.	512 (via Daisy Chain)
Port Selection	Pushbutton, OSD, Hotkey	
	External Console Ports	1 x SPHD-15 Male (Green)
Connectors	KVM Ports	16 x SPHD-15 Female (Yellow)
	Daisy Chain Ports	1 x DB-25 Male (Black)
	FW Upgrade	1 x RJ-11 Female (Black)
	Power	1 x 3-prong AC Socket
	USB Port	1 x USB 1.1 Type A Female (White)
Switches	External Mouse	1 x 6-pin Mini-DIN Female (Green)
	Reset	1 x Semi-recessed Pushbutton
	Port Selection	2 x Pushbutton (Station) 2 x Pushbutton (Port)
	Power	1 x Rocker
	F/W Upgrade	1 x Slide
LEDs	LCM adjustment	4 x Pushbutton
	On Line	16 (Green)
	Selected	Station ID Port ID
	Power	2 x 7-segment (Yellow) 2 x 7-segment (Yellow)
	Lock	1 (Blue)
Physical Properties	Lock	1 x Num Lock (Green) 1 x Caps Lock (Green) 1 x Scroll Lock (Green)
	LCD Power	1 (Orange)
	Keyboard / Mouse	PS/2 and USB
Emulation	1280 x 1024@75Hz : DDC2B	
Video	1-255 Seconds	
Scan Interval	100-240VAC, 50/60Hz; 1A	
I/P Rating	120V / 35.2W; 230V / 41.8W	
Power Consumption	0 - 40 °C	
Environment	Operating Temp.	-20 - 60 °C
	Storage Temp.	0 - 80% RH, Non-condensing
	Humidity	
Physical Properties	Housing	Metal
	Weight	17.50 Kg
	Dimensions (L x W x H)	70.50 x 48.20 x 4.40 cm (19" / 1U)

All specifications are subject to change without notice.

Rack Mounting Kit	Depth	Easy Installation Rack Mounting Kit	Depth
2X-010G (Long/Optional)	68cm - 105cm	2X-012G (Long/Optional)	68cm - 105cm
Short (Standard)	42cm - 77cm	2X-011G (Short/Optional)	57cm - 70cm