




Rear Bracket USB to 1 x Parallel DB 25

Description

This Delock slot bracket can be installed into a free slot of your PC and can be connected to an internal USB interface. It expand your system by one external parallel port.

Images

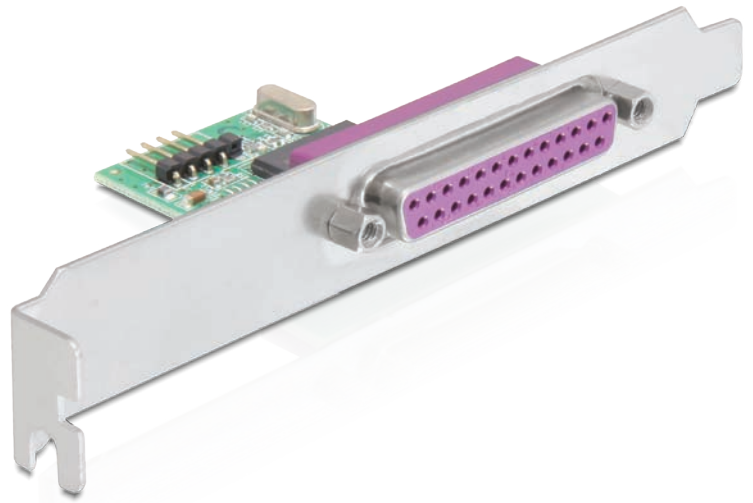

Ref.	61941
EAN	4043619619412
Country of origin	Taiwan
Customs tariff number	84733020

Specification

- Chipset: Prolific PL-2305H
- Connector: external: 1 x parallel DB25 female with screw nuts
internal: 1 x 4 pin USB pin header
- Data transfer rate up to 1.5 Mb/s
- IEEE 1284 standard
- Fully automatic, high speed bi-directional parallel port
- 512 bytes dynamically allocated unified data buffer for upstream and downstream data transfer.
- Operating temperature: -10 °C ~ 80 °C
- Storage temperature: -20 °C ~ 100 °C

System requirements

- Windows XP/Vista/7/7-64, Linux ex Kernel 2.6
- PC with a free PC slot
- One free internal 4 pin USB pin header

Package content

- Slot bracket USB > parallel
- USB pin header cable 4 pin to 4 pin
- Driver CD
- User manual

Package

- Box