

RICOH
imagine. change.

Aficio®

SG 2100N
SG 3110DN
SG 3110DNw

GELJET™ Printer

☑ Printer



Aficio™ SG
2100N

29
ppm

Colour
B/W

Aficio™ SG
3110DN

29
ppm

Colour
B/W

Aficio™ SG
3110DNw

29
ppm

Colour
B/W

GELJET™: Affordable colour for every need

Want to give your customers and employees affordable, high quality colour documents on demand? You can with the Aficio™ SG 2100N/SG 3110DN/SG 3110DNw. These innovative GELJET™ printers have a small footprint, full front access and easy connectivity including WiFi (SG 3110DNw.) They feature GLOBAL's fast-drying Liquid Gel™ technology to simplify colour printing in shops, businesses and home offices everywhere.



The GELJET™ advantage

GELJET™ printers use fast-drying viscous, pigment-based Liquid Gel™ that does not permeate paper and dries fast. It delivers high quality colour at low cost on plain paper. And, because Liquid Gel™ dries instantly, it also enables high speed duplex printing.



Unique ECONomy Color

In ECONomy Color mode, GELJET™s can distinguish between text and images – text is printed solid black, while image thickness is reduced by half. So you get quality colour documents at virtually the cost of black & white.



User-friendly design

With the control panel and operations accessible from the front, these versatile printers fit virtually anywhere. There is also easy USB and network connectivity, plus WiFi with the SG 3110DNw, and simple envelope setup straight from the printer driver window.

Simplify colour printing



Improved productivity

Get your first colour print in 6.5 seconds. Enjoy fast output at up to 29 ppm and uninterrupted print runs using high capacity paper tray options. Easily print banners, envelopes and custom papers thanks to the Multi Bypass Tray option.


Avoid outsourcing

GELJET™s can handle a wide range of paper sizes and weights. You can even print double-sided with the SG 3110DN and SG 3110DNw's paper-saving duplex units. This gives you the flexibility to create a variety of professional-looking colour documents in-house.



Reliable, secure and compliant

GELJET™s have a simple architecture with a minimal number of highly durable parts. This ensures maximum reliability and long life. They also comply with the latest Energy Star and Blue Angel (BAM) international standards for energy efficiency and environmental friendliness.

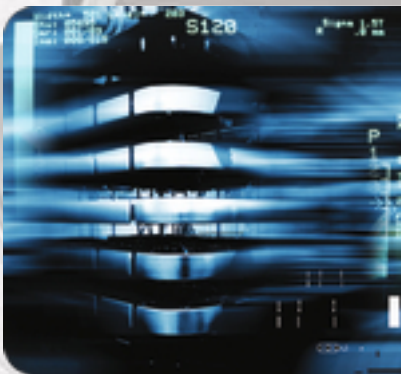

Green cost-efficiency

With a partially recyclable plant-based plastic chassis, toxic free materials and energy-saving features, GELJET™s reflect GLOBAL's environmental commitment. GELJET™s consume 90% less power than a colour laser printer, which not only reduces CO2 emissions - it also lowers your TCO.



SG 2100N/SG 3110DN/SG 3110DNw

MAIN SPECIFICATIONS

Aficio®

GENERAL

Warm-up time:	35 seconds
First output speed:	Full colour: 6.5 seconds B/W: 5.5 seconds
Continuous output speed:	Full colour: 29 pages per minute B/W: 29 pages per minute
ISO speed:	Full colour: 12 pages per minute B/W: 12 pages per minute
Memory:	32/128/128 MB
Duty cycle:	10,000 prints per month
Dimensions (W x D x H):	399 x 360/436.5/436.5 x 212.5 mm
Weight:	9.5/10.5/10.5 kg
Power source:	220 - 240 V, 50/60 Hz

Print speed may vary depending on the type of output. Continuous output speed is based on RPCS driver (high speed mode). ISO speed is based on RPCS driver (reference data).

Wireless LAN (IEEE 802.11 b/g/n) is available for SG 3110DNw. Yield measuring method: ISO/IEC 24711. Low yield print cartridges are also available (600 sheets). High yield only available for SG 3110DN/SG 3110DNw. Printer language PCL5c + PCL6 only available for SG 3110DN/SG 3110DNw. Duplex only available for SG 3110DN/SG 3110DNw. Options only available for SG 3110DN/SG 3110DNw.



PRINTER

Printer language:	Standard: PCL5c (SG 2100N, SG 3110DN, SG 3110DNw), PCL6 (SG 2100N, SG 3110DN, SG 3110DNw), RPCS
Print resolution:	Maximum: 3,600 x 1,200 dpi
Interface:	Standard: USB 2.0, Ethernet 10 base-T/100 base-TX
Network protocol:	TCP/IP
Windows® environments:	Windows® XP Windows® Vista Windows® 7 Windows® Server 2003 Windows® Server 2008
Mac OS environments:	Macintosh OS X v10.5 or later



PAPER HANDLING

Recommended paper size:	A4, A5, A6, B5, B6
Paper input capacity:	Standard: 250 sheets Maximum: 250/850/850 sheets
Paper output capacity:	Standard: 100 sheets
Paper weight:	Paper tray(s): 60 - 163 g/m ² Optional paper tray(s): 60 - 105 g/m ² Bypass tray: 60 - 256 g/m ²

ECOLOGY

Power consumption:	Operating power: 22.84/25.56/26.75 W Energy Saver mode: 1.06/0.71/2.66 W
--------------------	---

SOFTWARE

Optional:	SmartDeviceMonitor® for Admin/Client, DeskTopBinder™ Lite, Remote Communication Gate S Pro
-----------	--

OPTIONS (SG 3110DN, SG 3110DNw)

2 x 250-sheet paper tray
Multi-bypass tray

CONSUMABLES

Gel cartridge capacity (regular yield)
Black: prints (GC-41KL)
Cyan: prints (GC-41CL)
Magenta: prints (GC-41ML)
Yellow: prints (GC-41YL)

ISO9001 certified, ISO14001 certified, ISO27001 certified

All brand and/or product names are trademarks of their respective owners.

Specifications and external appearance are subject to change without notice. The colour of the actual product may vary from the colour shown in the brochure. The images in this brochure are not real photographs and slight differences in detail might appear.

Copyright © 2016 Ricoh Europe PLC. All rights reserved. This brochure, its contents and/or layout may not be modified and/or adapted, copied in part or in whole and/or incorporated into other works without the prior written permission of Ricoh Europe PLC.

www.ricoh-europe.com

RICOH
imagine. change.